


Comfort & Convenience. All-in-one amenities.


QUALITY DOMES DIRECT
BUILT TO LAST

Portable Twin Toilet

A luxury twin toilet block with two private toilet and basin spaces, designed for practical site use, temporary facilities, rural properties and more.



Code: BR003



Two Private Cubicles



Toilet and Basin



Complete Setup

Includes toilet, hand basin and internal fittings.



Internal Fitout

Delivered with water, waste and power connections fitout.



Compact Footprint

2.16m L x 1.28m W x 2.36m H



Durable, Long-Life

Solid construction, low-maintenance solution.



Proudly Australian



Built to Last



Ready When You Need It

BR003

Portable Twin Toilet

Two private cubicles, each with toilet and hand basin.

A practical, self-contained twin toilet block designed to provide hygienic on-site amenities where permanent facilities are unavailable. Each cubicle includes a porcelain dual-flush toilet and hand basin.

Complete. Comfortable. Ready for Site.

Pre-plumbed and wired internal bathroom, delivered ready for final water, sewer and electrical connection.



Length
2.16m

Width
1.28m

Height
2.36m

Weight
Approx. 480KG

What is inside the bathroom?

Double toilet and basin in one compact unit.



Included features

- Water-saving **dual-flush porcelain toilets**. 4.5L full flush, 3L half flush.
- **Pedestal hand basins** with WELS 4-Star fittings.
- Steel frame with zinc-rich primer, powder coat finish, fire-resistant EPS wall panels.
- Internal LED lighting and exhaust fan in each cubicle.
- Single 3-pin GPO, exhaust fan, LED ceiling light and light switch in each cubicle.
- Non-slip, wear-resistant easy-clean floor. Wipedown wall panels - no grout.
- Lockable doors with ventilation grill for privacy and airflow.



Plumbing and Electrical

Internal plumbing and electrical fitout to Australian Standards.



Low maintenance

Easy-clean surfaces with no grout lines and durable internal finishes.



Compact footprint

Space-saving design, compact footprint. Engineered for tight layouts with a minimal footprint.



Site-ready handling


Forklift slots and corner lifting lugs assist unloading and placement.

CONNECTIONS, DIMENSIONS & SITE SETUP

What you need to know before delivery and installation.

Water & Sewer Connections

The twin toilet is supplied with an internal plumbing fitout, ready for connection to services. Final water, sewer and electrical connections are the customer's responsibility, and should be completed by qualified tradespersons.


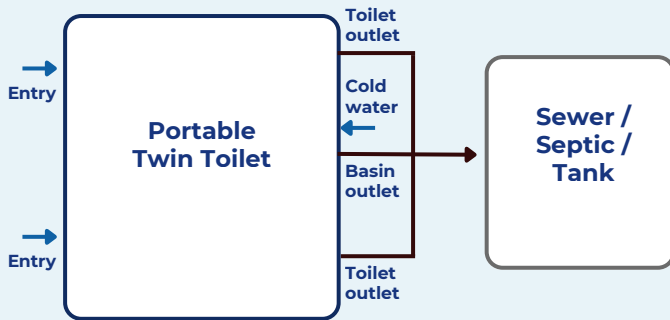


WELS WATERMARK
AS/NZS 6400:2016
4 Star Water efficiency.



Dimensions, Lifting & Placement

Overall size: 2.16m L x 1.28m W x 2.36m H

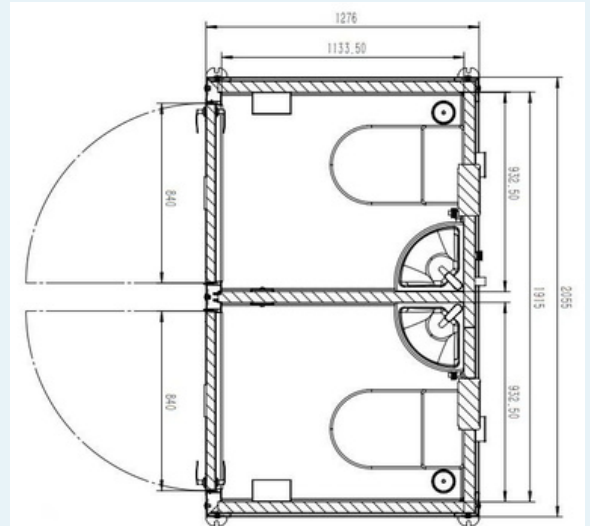

Corner lifting lugs



Forklift pockets

Connection Points

Water inlets:	20mm
Toilet outlet:	100mm x 2
Outlet centreline:	75mm from ground level
Hand basin outlet:	40mm
Power:	External 15AMP appliance inlet

Delivery Checklist

- ☐ Suitable access for delivery vehicle
- ☐ Room for unloading and placement
- ☐ Suitable lifting equipment
- ☐ Level and stable base prepared
- ☐ Water, sewer/waste and power services planned

Electrical

Connect to 240V supply through an external 15AMP appliance.



Single 3-pin plug point, ceiling exhaust fan, LED ceiling light and light switch included.

Council & Site Approval

Approval requirements can vary depending on location. Customers should check with local council requirements or relevant authority before installation.

Designed for

- ☒ Home renovation projects
- ☒ Public and community facilities
- ☒ Rural properties
- ☒ Events and outdoor facilities
- ☒ Construction sites
- ☒ Commercial and industrial sites
- ☒ Campsite and tourism facilities

Call: 0483 949 849

qualitydomesdirect.com.au

LEARN MORE

