



Comfort & Convenience. All-in-one amenities.

QUALITY DOMES DIRECT
BUILT TO LAST

Portable Twin Shower

A twin shower unit with two private shower cubicles. Designed for temporary or semi-permanent use on worksites, recreational and commercial facilities.



CODE: BR007



Two Private Cubicles



Shower and exhaust fan



Complete Setup

Includes two separate showers, exhaust fans and all fittings.



Internal Fitout

Delivered with water, waste and power connection fitout.



Compact Footprint

2.16m L x 1.28m W x 2.36m H.



Durable, Long-Life

Solid construction, low-maintenance solution.



Proudly Australian



Built to Last



Ready When You Need It

Portable Twin Shower

Twin shower unit with two private cubicles

A compact, self-contained twin shower block designed to provide clean, private and hygienic shower amenities where permanent facilities are unavailable.

Complete. Comfortable. Ready for Site.

Pre-plumbed and wired internal bathroom, delivered ready for final water, sewer and electrical connection.



Length
2.16m


Width
1.28m

Height
2.36m

Weight
Approx. 480KG

What's inside the bathroom?

Two private shower cubicles in one compact, portable unit.



Included features

- Fully adjustable shower heads with flick mixer for precise hot and cold water control.
- Lockable doors with large, screened ventilation grills for maximum airflow.
- Internal LED lighting and exhaust fan in each cubicle.
- Soap dish and clothes hook included in each shower space.
- Non-slip, wear-resistant, easy-clean floor. Hygienic wipedown wall panels - no grout.
- Delivered ready to connect to hot and cold water, waste water and AC power.
- Steel frame with zinc-rich primer and powder coat finish. Fire-resistant EPS wall panels throughout.



Plumbing and Electrical

Internal plumbing and electrical fitout to Australian Standards.



Low maintenance

Easy-clean, hygienic, wipe-down surfaces. Durable internal finishes.



Compact design

Created to fit small spaces. Built to deliver a comfortable experience



Site-ready handling


Forklift slots and corner lifting lugs assist unloading and placement.

SERVICES CONNECTIONS, DIMENSIONS & SITE SETUP

Practical information to prepare for delivery and installation.

Water & Sewer Connections

The bathroom is supplied with an internal plumbing fitout, ready for connection to services. Final water, sewer and electrical connections are the customer's responsibility, to be completed by qualified tradespersons.

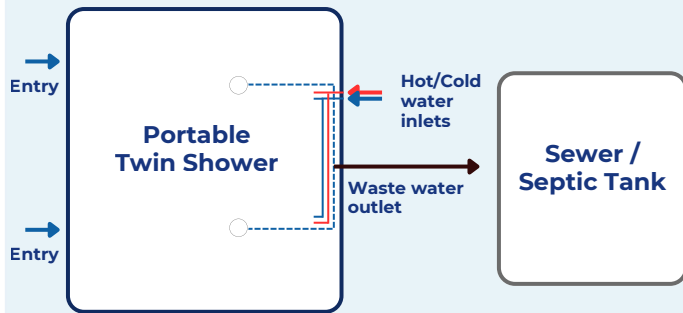



External hot water system required

WELS WATERMARK
AS/NZS 6400:2016
4 Star Water efficiency.



Dimensions, Lifting & Placement

2.16m L x 1.28m W x 2.36m H

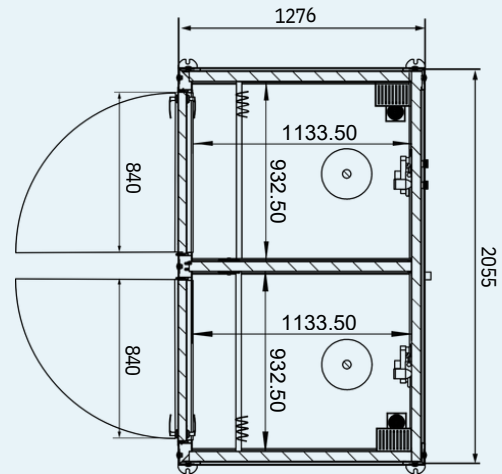

Corner lifting lugs



Forklift pockets

Connection Points

Water inlets:	20mm
Outlet centreline:	75mm from ground level
Hand basin outlet:	40mm
Power:	External 15AMP appliance inlet
Hot water:	External electric or instantaneous gas

Pre-Delivery Checklist

- ☐ Suitable access for delivery vehicle
- ☐ Suitable lifting equipment available if required
- ☐ Room for unloading and placement
- ☐ Level and stable base prepared
- ☐ Water, sewer/waste and power services planned

Electrical

Connect to 240V supply through an external 15AMP appliance.



Single 3-pin plug point, exhaust fan, LED ceiling light and light switch included.

Council & Site Approval

Approval requirements can vary depending on location. Customers should check with local council requirements or relevant authority before installation.

Designed for

- ✓ Construction sites
- ✓ Temporary accommodation
- ✓ Rural properties
- ✓ Events and outdoor facilities
- ✓ Renovation projects
- ✓ Commercial and industrial sites
- ✓ Campsite and tourist facilities

Call: 0483 949 849

qualitydomesdirect.com.au

LEARN MORE