

Comfort & Convenience.

A Compact, All-in-one Solution.

QUALITY DOMES DIRECT
BUILT TO LAST

A hygienic, dual-amenity unit featuring a private toilet on one side and a separate enclosed shower on the other.



CODE: BR008

Private Toilet. Enclosed Shower. One Compact Unit.



Toilet and Shower



Two Private Cubicles



Complete Setup

Includes shower, toilet, vanity and internal fittings.



Internal Fitout

Delivered with water, waste and power connection fitout.



Compact Footprint

2.16m L x 1.28m W x 2.36m H



Durable, Long-Life

Solid steel construction, low-maintenance solution.



Proudly Australian



Built to Last



Ready When You Need It

Portable Dual Toilet and Shower

Dual unit with individual toilet and shower cubicles.

A luxury, hygienic and portable dual toilet and shower facility. Perfect for worksites, outdoor events, community spaces, camp sites, home or office renovations.

Complete. Comfortable. Ready for Site.

Pre-plumbed and wired, delivered ready for final water, sewer and electrical connection.



Length
2.16m

Width
1.28m

Height
2.36m

Weight
Approx 480KG

What's inside the unit?

A compact dual unit with a separate toilet and shower.



Included features

- Separate toilet and shower cubicles, for privacy and convenience.
- 3-setting adjustable shower head with flick mixer for precise hot and cold water flow.
- Lockable doors, with large screened ventilation grills for maximum airflow.
- Internal LED lighting and exhaust fan in each cubicle.
- Soap dish and clothes hook included.
- Non-slip, wear-resistant, easy-clean floor. Hygienic wipedown walls - no grout.
- Solid-steel frame with powder coat finish. Fire-resistant EPS wall panels throughout.



Plumbing and Electrical

Internal plumbing and electrical fitout to Australian Standards.



Compact design

Created to fit small spaces. Built to deliver a comfortable experience



Low maintenance

Easy-clean, hygienic, wipe-down surfaces Durable internal finishes.



Site-ready handling


Forklift slots and corner blocks assist unloading and placement.

CONNECTIONS, DIMENSIONS & SITE SETUP

Practical information to prepare for delivery and installation.

Water & Sewer Connections

Supplied with internal plumbing fit out, ready for final connection to services. Water, sewer and electrical connections are the customer's responsibility, to be completed by qualified tradespersons.

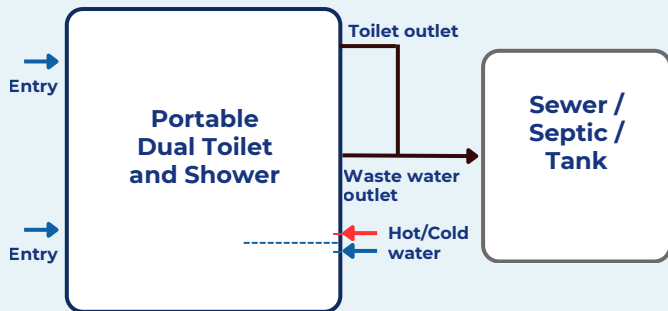



External hot water system required

WELS WATERMARK
AS/NZS 6400:2016
4 Star Water efficiency.



Dimensions, Lifting & Placement

2.16m L x 1.28m W x 2.36m H

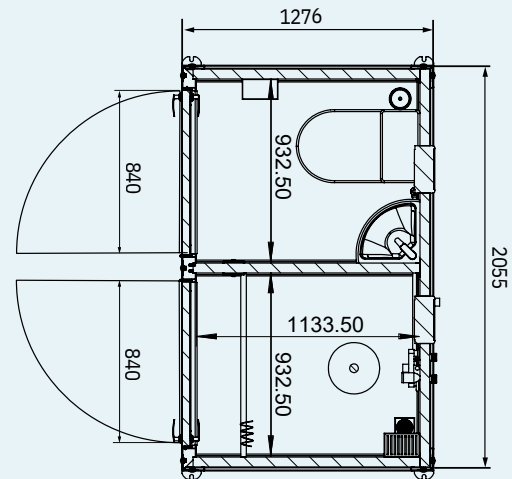

Corner hooks



Forklift pockets

Connection Points

Water inlets:	20mm
Toilet outlet:	90/100mm
Outlet centreline:	75mm from ground level
Hand basin outlet:	40mm
Power:	External 15AMP appliance inlet
Hot water:	External electric or instantaneous gas

Pre-Delivery Checklist

- ☐ Suitable access for delivery vehicle
- ☐ Suitable lifting equipment available if required
- ☐ Room for unloading and placement
- ☐ Level and stable base prepared
- ☐ Water, sewer/waste and power services planned

Electrical

Connect to 240V supply through an external 15AMP appliance.



Single 3-pin plug point, exhaust fan, LED ceiling light and light switch included.

Council & Site Approval

Approval requirements can vary depending on location. Customers should check with local council requirements or relevant authority before installation.

Designed for

- ✓ Construction sites
- ✓ Temporary accommodation
- ✓ Campsite and tourism facilities
- ✓ Events and outdoor facilities
- ✓ Renovation projects
- ✓ Commercial and industrial sites
- ✓ Rural properties

Call: 0483 949 849

qualitydomesdirect.com.au

LEARN MORE